





# SP-S 12

## SP- S 12 (STRAIGHT RUNNING)

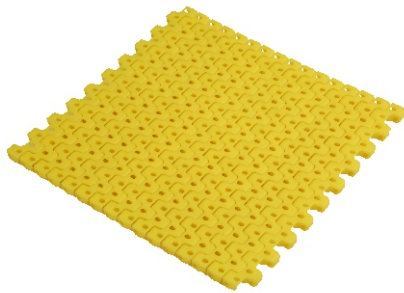

Flush grid

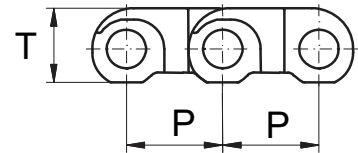

Description	mm	inch
Pitch (P)	12.7	0.50
T	8.50	0.34
Rod (Ø)	4.0	0.15
Surface type	18 % open	
Color	<span style="color: yellow;">■</span> <span style="color: white;">○</span> <span style="color: blue;">■</span>	
Material	PP / POM	
Curve	No	

## SP-S 12 (SPROCKET)

Teeth (Z)	Pcd (mm)	B	M/C	
			S	W
12	42	16.5	●	16
19	76	33.5	★	16
24	96	43.5	★	16
28	112	51.5	★	16

\* Type of bore : ★ - round & square , ■ - square, ● - Round

\* For material availability contact our sales team

\* A - minimal distance 14 mm (0.55")

\* M/C - Machined solid, M/D - Moulded solid, S - Availability , W - Sprocket Width

